
SCHEMATIC DIA(

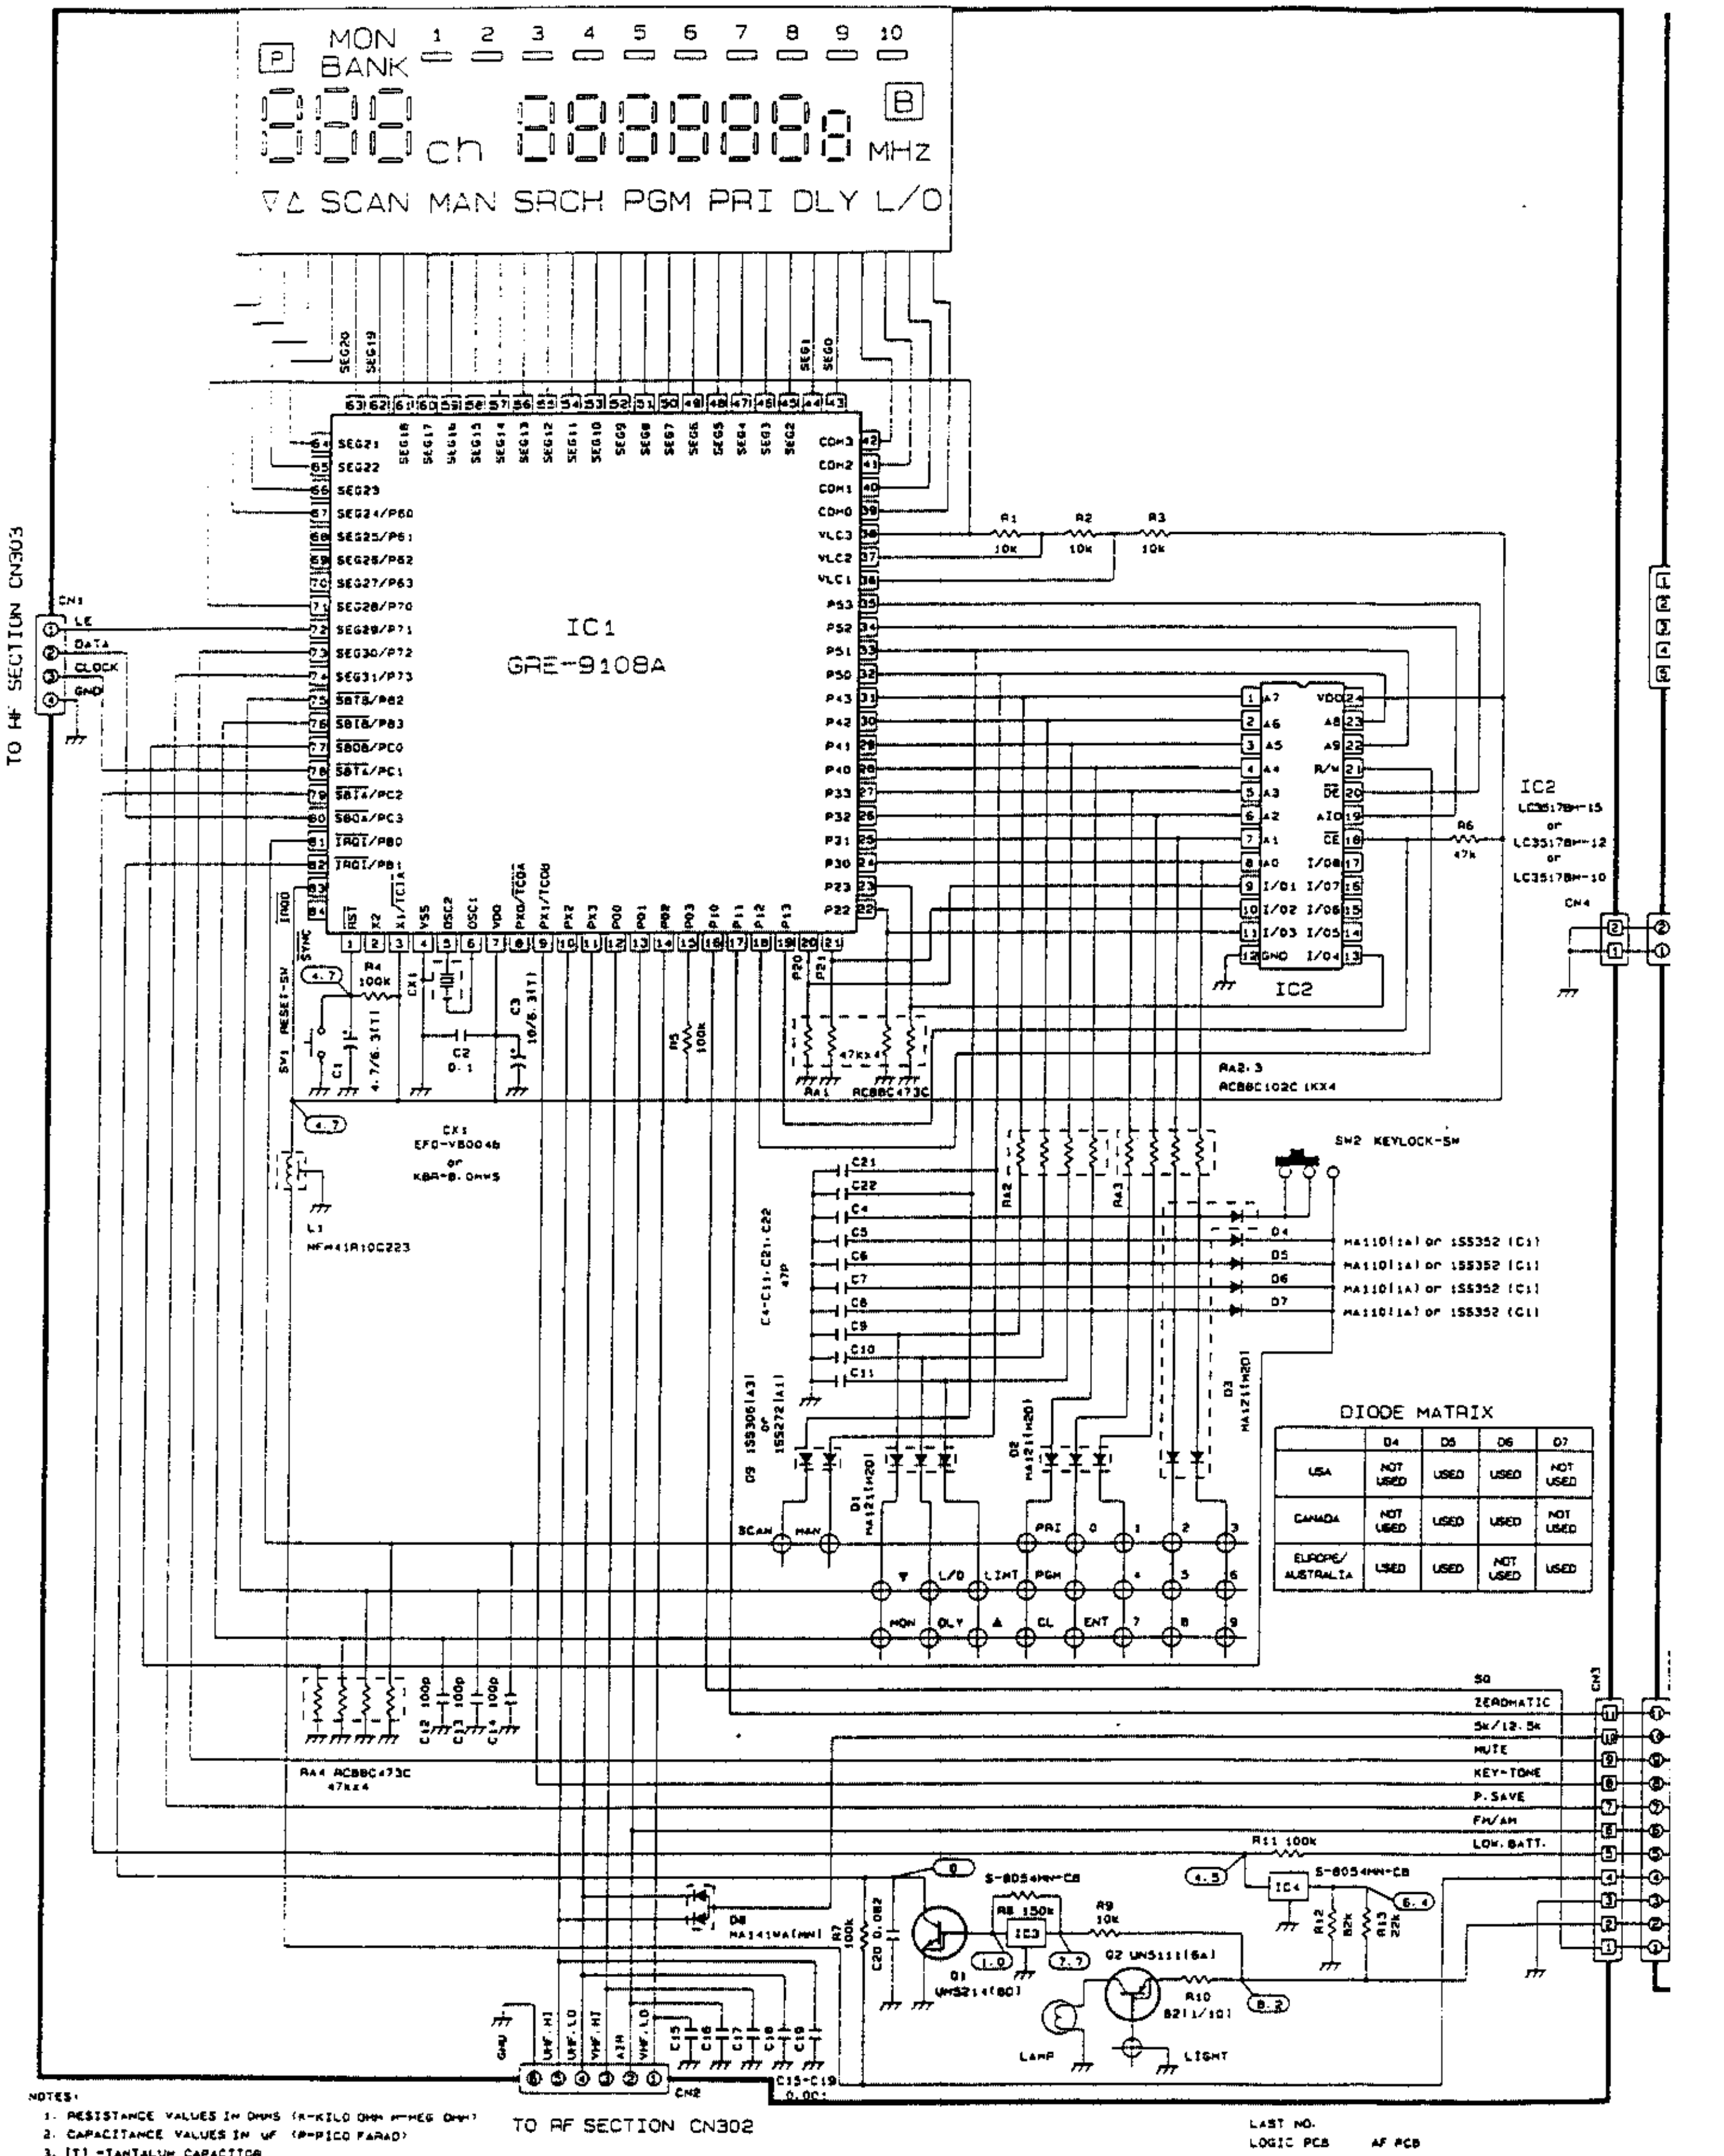

DIODE MATRIX

	D4	D5	D6	D7
USA	NOT USED	USED	USED	NOT USED
CANADA	NOT USED	USED	USED	NOT USED
EUROPE/ AUSTRALIA	USED	USED	NOT USED	USED

NOTES:

1. RESISTANCE VALUES IN OHMS (K=KILO OHM M=MEG OHM)
2. CAPACITANCE VALUES IN uF (P=PICO FARAD)
3. (T) =TANTALUM CAPACITOR
4. (M) =MYLAR CAPACITOR
5. NO SUFFIX: CERAMIC CAPACITOR
6. THIS SYMBOL DENOTES DC VOLTAGE MEASURED WITH DC VOLTMETER (100kOHM/V) UNDER FOLLOWING CONDITIONS. CH 1 HIGH BAND AT 150MHZ. MANUAL OPERATION. VOLUME AT MINIMUM AND SQUELCH CCW
7. THIS SYMBOL DENOTES DC VOLTAGE FOR AIRCRAFT BAND OPERATION
8. RATING OR TYPE NUMBER OF COMPONENT PARTS ARE SUBJECT TO CHANGE FOR IMPROVEMENT WITHOUT NOTICE

LAST NO.

LOGIC PCB	AF PCB
IC-4	IC-207
D-9	D-207
Q-2	Q-206
R-13	R-266
C-22	C-253